# SLOAN.

#### CODE NUMBER

10061401

#### DESCRIPTION

SU-1006 Urinal and G2 8186 Flushometer.

#### COMPONENTS

- Flushometer: Code 3250401
- Urinal: Code 1101006

#### DETAILS

- Flush Volume: 1.0 gpf (3.8 Lpf)
- Nominal Dimensions: 14 ¼" × 17 ¼" × 25 ½" (362 × 438 × 648mm)

#### **FLUSHOMETER FEATURES**

- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- "Low Battery" Flashing LED
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flex Tube Diaphragm designed for improved life and reduced maintenance
- Engineered Metal Cover with replaceable Lens Window
- Four (4) Size AA alkaline Batteries included
- Courtesy Flush® Override Button
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass

#### **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- <sup>3</sup>/<sub>4</sub>" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



## **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, cUPC Certified, UL Certified, BAA Compliant)

#### DOWNLOADS

- Standard Spud Urinal Installation Instructions
- Optima Plus Valve Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads


#### NOTES

All information contained within this document subject to change without notice.



### **ROUGH-IN**

SLOAN,

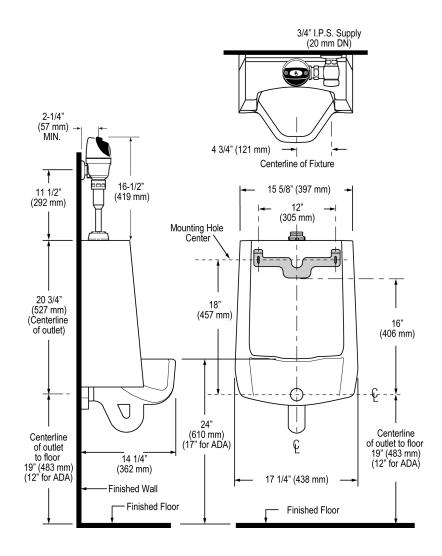

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com